



compactus®

INTRODUCTION

Multibay Compactus is ideal for the bulk storage of any regularly accessed item in the office, back-of-house in a retail area, library, warehouse or archive.

FEATURES

- Carries significantly greater loads due to a rigid track and base system
- Bases are mechanically-driven to reduce operator strain
- Fixed floor track systems cater for uneven floors
- Structural infill floors between the tracks provide a safe and solid working platform
- Infill platforms are finished with a 'walk-up' ramp to reduce trip-hazards and allow trolley access
- Available in a wide variety of sizes to allow system tailoring

TECHNICAL SPECIFICATIONS

Drive Type	Mechanically Assisted
Shelving & Accessory System	Ultima
Maximum System Width	6600 mm
Shelving Width	750 mm 900 mm 1050 mm 1200 mm
Shelving Depth	250 mm 300 mm 400 mm 450 mm 500 mm 600 mm
Shelving Heights	1875 mm 2175 mm 2400 mm
Overall System Heights	2050 mm 2350 mm 2575 mm
Maximum Bay Carrying Capacity	Up to 1000 kg per lineal meter
Maximum Movable Block Load	20 tonne
Standard Colour	Stone White Graphite Ripple Base
Anti-tilt System	Track & Runner

SHELF LOADS

Shelves have the following maximum load rating. These ratings are based on a uniformly distributed load (UDL).

Plain Shelves	Shelf Depth (mm)					
	250	300	400	450	500	600
Bay Width (mm)						
750	130kg	130kg	115kg	115kg	115kg	115kg
900	130kg	130kg	115kg	115kg	115kg	115kg
1050	80kg	80kg	80kg	80kg	100kg	100kg
1200	80kg	80kg	80kg	80kg	100kg	100kg

Stiffened Shelves	Shelf Depth (mm)				
	300	400	450	500	600
Bay Width (mm)					
750	240kg	240kg	200kg	200kg	200kg
900	240kg	240kg	200kg	200kg	200kg
1050	170kg	170kg	170kg	190kg	190kg
1200	170kg	170kg	170kg	190kg	190kg


OTHER

- Accessories**
- Ultima Shelf - Slotted
 - Ultima Shelf - Plain
 - Slotted Shelf Divider
 - Plain Shelf Divider
 - Filing Rack - Suspended
 - Filing Rack - Wrap Around
 - Roll Out File Frame
 - Roll Out Media Drawer
 - Roll Out Reference Shelf
 - Hanging File Chassis

If the shelving is being used for paper filing the figures below may be used as a guide to the actual load of the contents.

Shelf Width (mm)	Average Weight (kg)	Max Weight (kg)
750	25kg	37.5kg
900	30kg	45kg
1050	35kg	52.5kg
1200	40kg	60kg

OVERALL DIMENSIONS

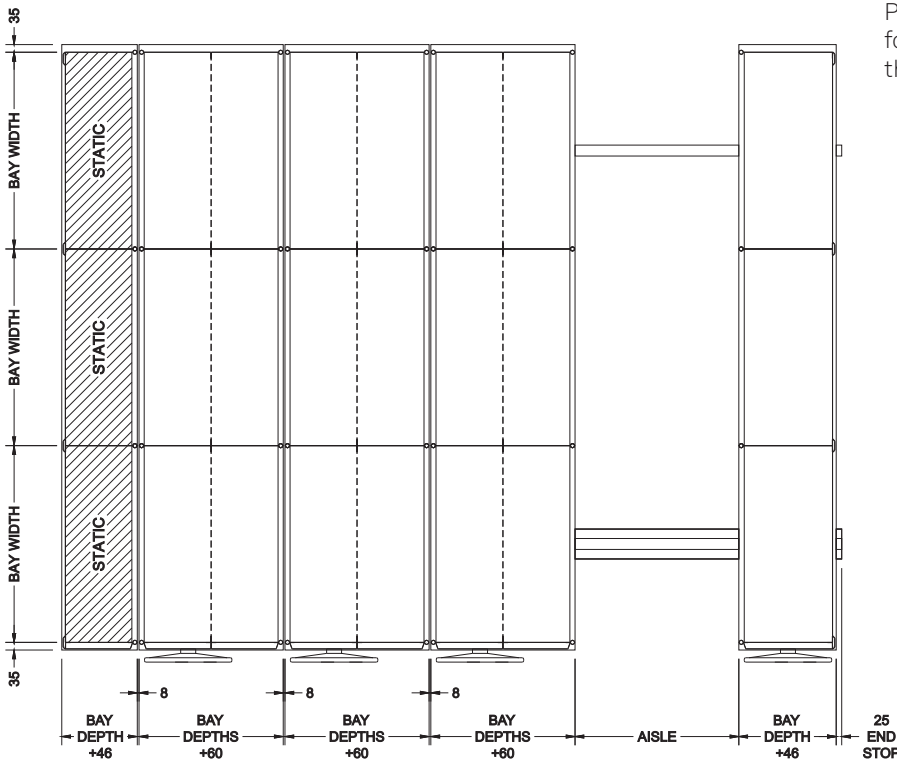

FLOOR LOADS

Please contact your Dexion Office representative for information relating to point loads exerted by the wheels on the tracks.

ENQUIRIES

For contact details, visit
www.dexionoffice.com.au
 Or call 1300 180 358